


Data sheet

ABS controlled crack element 130-smooth

Type Standard; height: 130 mm

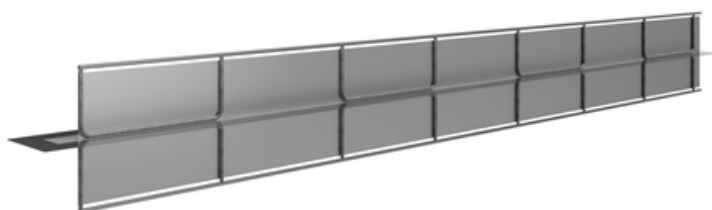

[Show product](#)



| | |
|---|--|
| article number: | 070281S |
| article group: | 233 - ABS Sollrisselement |
| GTIN: | 4251689504631 |
| customs tariff number: | 73269098 |
| packing unit: | pc |
| sales quantity unit: | 2.5 m |
| material: | St 37, galvanized special coating: polymer resin fabric- reinforced |
| colour: | crack inducing profile: silvery coating: black |
| installation height: | 130 mm |
| Width joint sheet metal: | 160 mm |
| length joint sheet metal: | 2,5 m |
| test certificate / approvals: | MFPA Leipzig |
| suitable for zones with frequently varying water levels: | Yes |
| Substances according to the SVHC list contained or proportional weight $\geq 0.1\%$: | No |
| Conform to REACH Guideline: | Yes |
| thermal scope of application: | -20 to +90°C |
| waterpressuretightness: | up to 6,0 bar (60m water column) |
| storage: | Store in undamaged and unopened original packaging in a dry place out of direct sunlight. |



MASTERTEC

SPEZIALARTIKEL FÜR DEN STAHLBETONBAU

disposal:

Can be disposed of at municipal waste landfill sites,
taking into account the local waste disposal regulations.

Basis

All dimensions and information in this data sheet reflect the results of the laboratory tests that have been carried out. Deviations from the values determined by us under laboratory conditions are possible due to environmental and operating conditions beyond our control. The data in this data sheet only applies for the product delivered by us. The product data corresponds only to the specifications in Germany. Possible country-specific deviations are not taken into account here.

Indication of law

The technical information reflects our current knowledge of ABS controlled crack element 130-smooth. It is intended only as information for users. As we do not know the envisaged applications and processing conditions, it is the responsibility of the user to carefully check that the product is suitable for the intended purposes. Due to the different components at the installation site and the working conditions in place there, MASTERTEC cannot provide any guarantee whatsoever for the result of the work. Claims arising from any legal relationship can only be recognised in the event of wilful intent or gross negligence, irrespective of the statements made here or advice provided verbally. In this case the user must prove that he has provided MASTERTEC in writing with all the information required to correctly assess the installation situation in good time. Subject to necessary product specifications or further developments. By providing this information MASTERTEC does not intend to infringe third party rights. The latest data sheet in each case applies. Our corresponding terms and conditions of sale and delivery apply.

The previous data sheets are no longer valid

Print date 18.05.2024 , last modified 03.07.2023