


# Data sheet

# Joint sheet metal 160 VB 2strips of 2.00 m-o.0.

fully coated on both sides



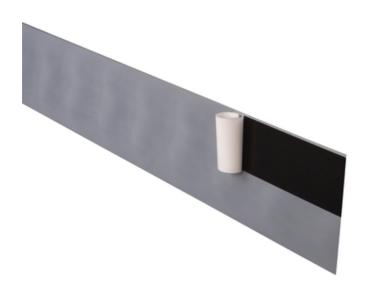





### Show product



Product video in further languages





article number:	070432
article group:	200 - Dichtblech VB Streifen h=160 mm
GTIN:	4251689511011
customs tariff number:	73269098
packing unit:	crate
sales quantity unit:	100 m
material:	St 37, galvanized
	special coating: polymer resin
	fabric-reinforced
colour:	black
length of joint sheet metal:	2,0 m
height of joint sheet metal:	160 mm
thickness of joint sheet	approx. 0,6 mm
metal:	
thickness of special	approx 0,15 mm
coating:	
total thickness:	approx. 0,9 mm
test certificate / approvals:	Test report PB 5.1/14-423-3
	MFPA Leipzig
suitable for zones with	yes
frequently varying water	
levels:	
corresponds to:	Utility class A for the wear classes 1 and
	2 in accordance with the WU guideline
Substances according to	no
the SVHC list contained or	
proportional weight ≥0.1%::	
conform to REACH	yes
Guideline:	



packaging:	wooden crate (210 x 30 x 25 cm)
	50 strips
	55 fixing clips
	12 crates per pallet
UV weathering:	Joint sheet metal which has been installed during the first
	construction stage already must not be exposed to free
	UV weathering for more than 4 weeks until completely
	cast in concrete. If construction is interrupted for a
	prolonged period, the joint sheet metal must be especially
	protected against UV radiation (dark foils etc.) in order to
	preserve usability.
storage:	Store in undamaged and unopened
	original packaging in a dry place out of direct sunlight.
disposal:	Can be disposed of at municipal waste landfill sites,
	taking into account the local waste disposal regulations.



#### **Basis**

All dimensions and information in this data sheet reflect the results of the laboratory tests that have been carried out. Deviations from the values determined by us under laboratory conditions are possible due to environmental and operating conditions beyond our control. The data in this data sheet only applies for the product delivered by us. The product data corresponds only to the specifications in Germany. Possible country-specific deviations are not taken into account here.

#### Indication of law

The technical information reflects our current knowledge of Joint sheet metal 160 VB 2-strips of 2.00 m-o.O.. It is intended only as information for users. As we do not know the envisaged applications and processing conditions, it is the responsibility of the user to carefully check that the product is suitable for the intended purposes. Due to the different components at the installation site and the working conditions in place there, MASTERTEC cannot provide any guarantee whatsoever for the result of the work. Claims arising from any legal relationship can only be recognised in the event of wilful intent or gross negligence, irrespective of the statements made here or advice provided verbally. In this case the user must prove that he has provided MASTERTEC in writing with all the information required to correctly assess the installation situation in good time. Subject to necessary product specifications or further developments. By providing this information MASTERTEC does not intend to infringe third party rights. The latest data sheet in each case applies. Our corresponding terms and conditions of sale and delivery apply.

### The previous data sheets are no longer valid

Print date 18.05.2024, last modified 17.10.2023